


Evo II

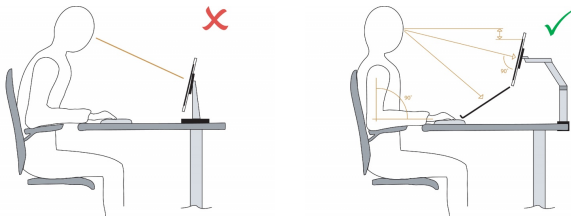

Research

An optimum monitor position leads to lesser discomfort and complaints to the neck (Kumar 1994 McKinnon 1994, Marcus 2002). The optimum position increases the productivity by 10% (Sommerich et al, 1998). A relatively large viewing distance is less straining to the eyes, condition however is that the characters on the screen must be evenly larger (Owens and Wolf Kelly 1987). Larger characters can be read quicker than small ones (Tullis et al, 1995), small characters therefore decrease the productivity (Jaschinski-Kruza, 1988).

1



1. well designed
2. cable management
3. height adjustment

2



3



Ergonomic: effortless motion and adjustment to move monitor in desired position

Quick and easy: Quick-install with VESA standard 75/100

No cables in sight: advanced cable management

Mounting: clamp (range 0-30 mm) and standard also with bolt through available with a large clamp with range of 55 mm max.

Environmentally-friendly: for 99% recyclable.

Carrying capacity: 2.7 - 9.0 kg

Specifications

Dimensions:	226 x 246 x 110 mm (W x D x H)
Weight:	3300 g
Product code:	BNEEVOII



Health & Safety Regulations

Council Directive 90/270/E The minimum safety and health requirements for work with display screen equipment. The screen must swivel and tilt easily and freely to suit the needs of the operator.